

Model SMT-262 Precision Balance

Product Details

| Part # | 262-006 | 262-012 | 262-030 | 262-060 |
|---------------------------|----------------------------|-----------------------|----------------------|---------------------|
| Price | \$295.00 | \$295.00 | \$295.00 | \$295.00 |
| Capacity | 6.6 lb / 3 kg | 13 lb / 6 kg | 33 lb / 15 kg | 66 lb / 30 kg |
| Resolution | 0.0005 lb / 0.0001 kg | 0.0005 lb / 0.0002 kg | 0.002 lb / 0.0005 kg | 0.005 lb / 0.001 kg |
| Accuracy / Linearity | +/- 1d | +/- 1d | +/- 1d | +/- 1d |
| Divisions | 30,000 | 30,000 | 30,000 | 20,000 |
| Weight Platter Dimensions | 11.375" x 9.375" | | | |
| Units of Measure | LB, KG | | | |
| Operating Temp | 50° - 104° F (10° - 40° C) | | | |




Model 262 Precision Balance and Counting Scale



Large 0.75" H weight digits with blue backlight display

Product Specifications

| | |
|------------------------------------|---|
| Display : | 0.75" H digits with blue back light display |
| Construction: | Plastic housing, stainless steel weigh platter with protective film, plastic cover for keyboard & display |
| Operator Keys: | On/Tare, Off/Mode, Function (Print) |
| Interface: | RS-232C Null Modem Interface, 9 pin DB-9 connector |
| Power: | 120 V AC Wall mount adapter with 5 foot cord, Rechargeable Battery |
| Battery Life: | 30 hours of use with low battery indication |
| Type Approval: | For use in non-trade applications |
| Approvals / Certifications: | FCC compliance, UL/CUL AC adapter |
| Package Contents: | Scale, AC adapter, 2.5" Below Balance Weight Hook, Rechargeable battery |
| Scalesco Warranty Policy: | 1 year from date of shipment |

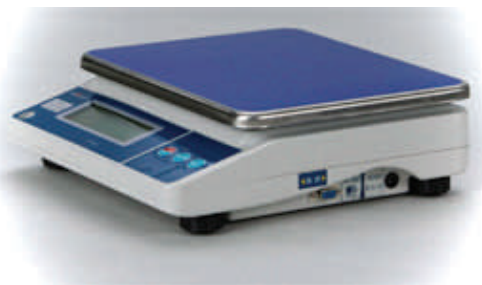

RS-232 Interface for transmitting data upon the press of the Func key.

Scalesco Measurement Technology Inc.

1200 Indus Street Suite A, Fairmont MN 56031
 (Toll Free) 866-587-9773 (Phone) 507-238-9773 (Fax) 507-238-5447
 (Web-site) <http://www.scales-co.com> (E-mail) sales@scales-co.com

Model SMT-262 Precision Balance

Product Information

| Part # | 262-006 | 262-012 | 262-030 | 262-060 |
|--------------------------------------|-----------------------------|-------------|-------------|--------------|
| Product Dimensions | 12.25" D x 11.375" W x 4" H | | | |
| Package Dimensions | 14" x 13.25" x 6.5" | | | |
| Product Weight | 8 lbs | | | |
| Ship Weight | 11 lbs | | | |
| Required External Linear Cal Weights | 1 and 3 kg | 6 and 12 kg | 5 and 15 kg | 10 and 30 kg |
| Recommended Test Weight | 1000 grams | 3000 grams | 5000 grams | 10 kg |

Product Features and Functions

| | |
|---|---|
| RS-232 | Transmits positive/negative weight or "pieces" when function (print) key is pressed. |
| Upper/ Lower Limits | Used as a check weighing or count check feature. Enter your lower and upper weight or piece tolerances from the keyboard, an audible alarm will indicate if the item placed on the scale is within the tolerance setting. |
| Counting Scale | Simple 3 button functionality. Preset sample sizes of 5, 10, 20 ,30, 40 and 50 pieces. Displays total count only |
| LCD Display | 0.75" back light LCD display provides visibility for both indoor and outdoor use. Turn on or off the back light using the Mode key. |
| Below Balance Weight Hook | Install the included weight hook directly into the bottom of the scale for weighing hanging items with |
| Std Calibration | Standard calibration allows you to enter the calibration weight value you have available. Capable of calibrating using LB or KG weights. |
| Linear Calibration | Linear calibration allows you to fine tune the weight accuracy with the use of 1/3 and full capacity kilogram weights. |
| Adjustable Feet and Level Bubble | Allows you to adjust scale on uneven surfaces to provide best weighing performance |
| Tare Range | Up to 100% of max. capacity, subtractive (subtract tare weight from max capacity = new max capacity) |
| Weight Response | Stable weight reading within 3 seconds. |
| Weight Platter Protective Film | Permanent, provides additional protection against corrosion from chemicals and static. |

Options/Accessories/Replacement Parts

| Part Number | Description |
|-------------|--------------------------------|
| S262-001 | Wall mount AC adapter |
| S262-002 | Rechargeable Battery |
| 100-500 | 500 Gram Class F2 test weight |
| 100-001 | 1000 Gram Class F2 test weight |
| 100-002 | 2000 Gram Class F2 test weight |

Scalesco Measurement Technology Inc.

1200 Indus Street Suite A, Fairmont MN 56031
(Toll Free) 866-587-9773 (Phone) 507-238-9773 (Fax) 507-238-5447
(Web-site) <http://www.scales-co.com> (E-mail) sales@scales-co.com