


Model SMT-2012 General Purpose Scale

Product Details

Part #	2012-200	2012-300	2012-600
Price	\$395.00	\$395.00	\$395.00
Capacity	200 lb / 100 kg	300 lb / 150 kg	600 lb / 300 kg
Resolution	0.02 lb / 0.01 kg	0.05 lb / 0.02 kg	0.1 lb / 0.05 kg
Accuracy	+/- 0.04 lb	+/- 0.10 lb	+/- 0.2 lb
Divisions	10,000	7,500	6,000
Tare Range	Up to 100% of max. capacity, subtractive (subtract tare weight from max capacity = new max capacity)		
Weight Platter Dimensions	18" x 22"		
Units of Measure	LB, Kilogram		
Operating Temp	50° - 104° F (10° - 40° C)		



SMT 2012 assembled with 29" Column Post

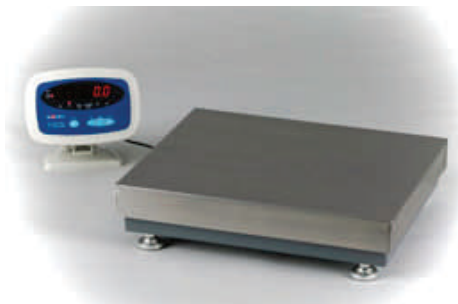

SMT 2012 with 4.5 foot or display cable



Large LED Display

The SMT-2012 general purpose scale is designed for the most heavy industrial use within the warehouse, at an affordable price. Rechargeable battery operation provides up to 35 hours of use before charging.

Assemble the scale using the column post mount or Desktop/Wall mount display bracket to fit your applications needs. Includes tools & hardware for easy installation.

Product Specifications

Display :	0.8" Red LED display, 4.5' of display cable when connected to base
Construction:	ABS plastic display and mounting stand, 18 gauge stainless steel weight platter & 29" column, painted mild steel base
Operator Keys:	On/Off (Zero) / Print (Wt. Hold) , Tare, Units
Interface:	9 Pin RS-232 Interface
Power:	AC wall mount adapter, rechargeable battery
Battery Life:	35 hours of continuous use
Type Approval:	For use in non-trade applications
Approvals / Certifications:	UL approved AC adapter
Package Contents:	Scale Base w/column mount, indicator mounting brackets, AC adapter, rechargeable battery, 29" column
Scalesco Warranty Policy:	1 year from date of shipment

Scalesco Measurement Technology Inc.

1200 Indus Street Suite A, Fairmont MN 56031
 (Toll Free) 866-587-9773 (Phone) 507-238-9773 (Fax) 507-238-5447
 (Web-site) <http://www.scales-co.com> (E-mail) sales@scales-co.com

Model SMT-2012 General Purpose Scale

Product Information

Part #	2012-200	2012-300	2012-600
Product Dimensions	Scale Base -18" W x 22"L x 5.38"H Overall- 18" W x 26.1"L x 38.1" H		
Package Dimensions	39" x 24" x 9"		
Product Weight	38 lb base, total weight 41 lb		
Ship Weight	52 lbs		
Min. Calibration Weight	25, 50 lbs	45, 75 lbs	75, 150 lbs

Product Features and Functions

Heavy Duty Base Construction	1.5" wide welded 16 gauge channel frame structure provides years of use.
Single Weight Hold	Use print key activate/deactivate the capture of the largest stable weight reading.
Auto Wt Hold & Release	Captures largest stable weight reading and automatically releases when new weight is applied. Configure to ignore changes in a stable weight readings from 0.4 to 10 lbs.
Pole mount Desktop or Wall-mount display	Available mounting options for mounting your indicator to meet your application needs, hardware included.
RS-232 Interface	7 Selectable settings for output formats; Print key or continuous output of displayed weight or GTN; including protocol for use with UPS Worldship®
Baud Rates & Data Formats	Selectable from 1200—19,200; 8N1, 7O1, 7E1
Calibration Method	Choose to calibrate with KG or LB. Calibrate using 12.5%-80% and 25% - 100% weights
Units of Measure	Configure for lb only, kg only, or lb/kg
Auto Shutdown	Configure unit to automatically turn off from 1-15 minutes of non-use
On/Off Switch	Saves electricity and stops recharging battery
Stabilization Filters	Four selectable settings to meet application environment
Print/ Wt Hold Key	Configure keyboard use- print only, wt hold only or both
Overload Stops	Built in protection to reduce load cell failure from frequent overloads.
Leveling feet	Allow you to adjust height up to 3/8" and lock into place.



Heavy Duty Base Construction with powder coat paint for years of use

Options & Accessories

<u>Part Number</u>	<u>Description</u>
S100-001	6 foot molded RS-232 cable (straight pass thru)
612-001	Replacement Indicator
LC2012 - "capacity"	Replacement load cell

Scalesco Measurement Technology Inc.

1200 Indus Street Suite A, Fairmont MN 56031
 (Toll Free) 866-587-9773 (Phone) 507-238-9773 (Fax) 507-238-5447
 (Web-site) <http://www.scales-co.com> (E-mail) sales@scales-co.com